

# Wall Plug SMPS Eco


Very low stand-by power consumption (< 0,25 W),  
complies to the Ecodesign-directive (2009/125/EC), Power-on LED indicator

## Technical Data:


- Protection type: IP 20
- Mains connection: 100 - 240 VAC
- Output voltage: 29 V
- Continuous output power: 14.5 W (0,5A\*29V rated)
- Peak output power: 58 W
- Duty cycle: 2 A @ 2/18 min. or 10 %
- Operating temperature: 0°C - 40°C
- Color: black RAL 9005
- Efficiency: min. 80%

## Safety features:

- Overcurrent protection (OCP)
- Short circuit protection (self-recovering)
- Overtemperature protection (OTP)
- Overvoltage protection (OVP)
- NTC temperature sensor (self resetting)
- Thermal fuse for additional protection
- Primary fuse as system protection

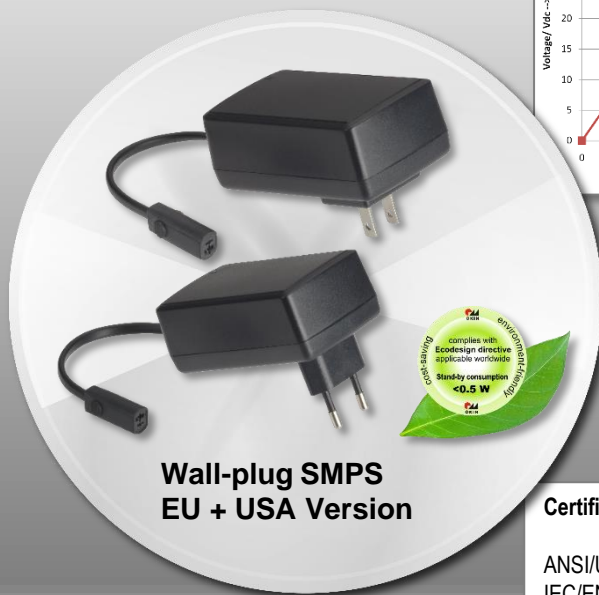

**Wall-plug SMPS  
EU + USA Version**

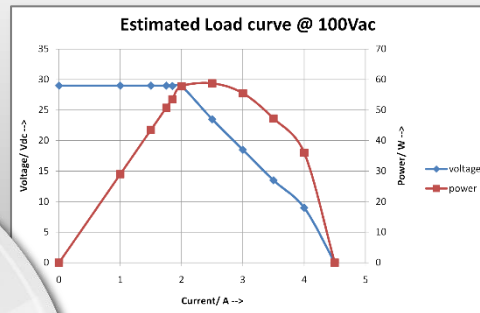

## Certificates:

ANSI/UL 1310 Class 2, CAN/CSA-C22.2 No.223  
IEC/EN 60335-1/A2:2006, IEC/EN 61558-2-6:2009,  
EN 62233:2008, IEC/EN 61558-1/A1:2009,  
IEC/EN 60950-1:2006, FCC