

new dynamics



A Phoenix Mecano Brand

EASY DRIVE S+4

The new dimension for a single drive system – quality with optimised efficiency. By developing the EASY DRIVE S, DEWERT has created a single drive system which complies with the strictest international standards. At the same time, it meets the market's requirements both economically and ecologically. Equipped with most up-to-date components, the system reacts more quickly and directly. It operates safely, and its low stand-by power consumption ensures that it is much more economical than other systems. In brief: **EASY DRIVE S = performance without compromise!**


MEGAMAT 2 EASY

Single drive

Load capacity	max. 4000 N push max. 3000 N pull
Stroke length	max. 425 mm
Fitting dimension	min. 163 mm + stroke
Adjustment speed	max. 28 mm/s

ECS control unit

Control unit	relay control
Output voltage	29 V constant
SMPS	external PD 14
Connectivity	for drives: 1-4 for operating elements: 1
Protection type	IPx4
Protection class	II

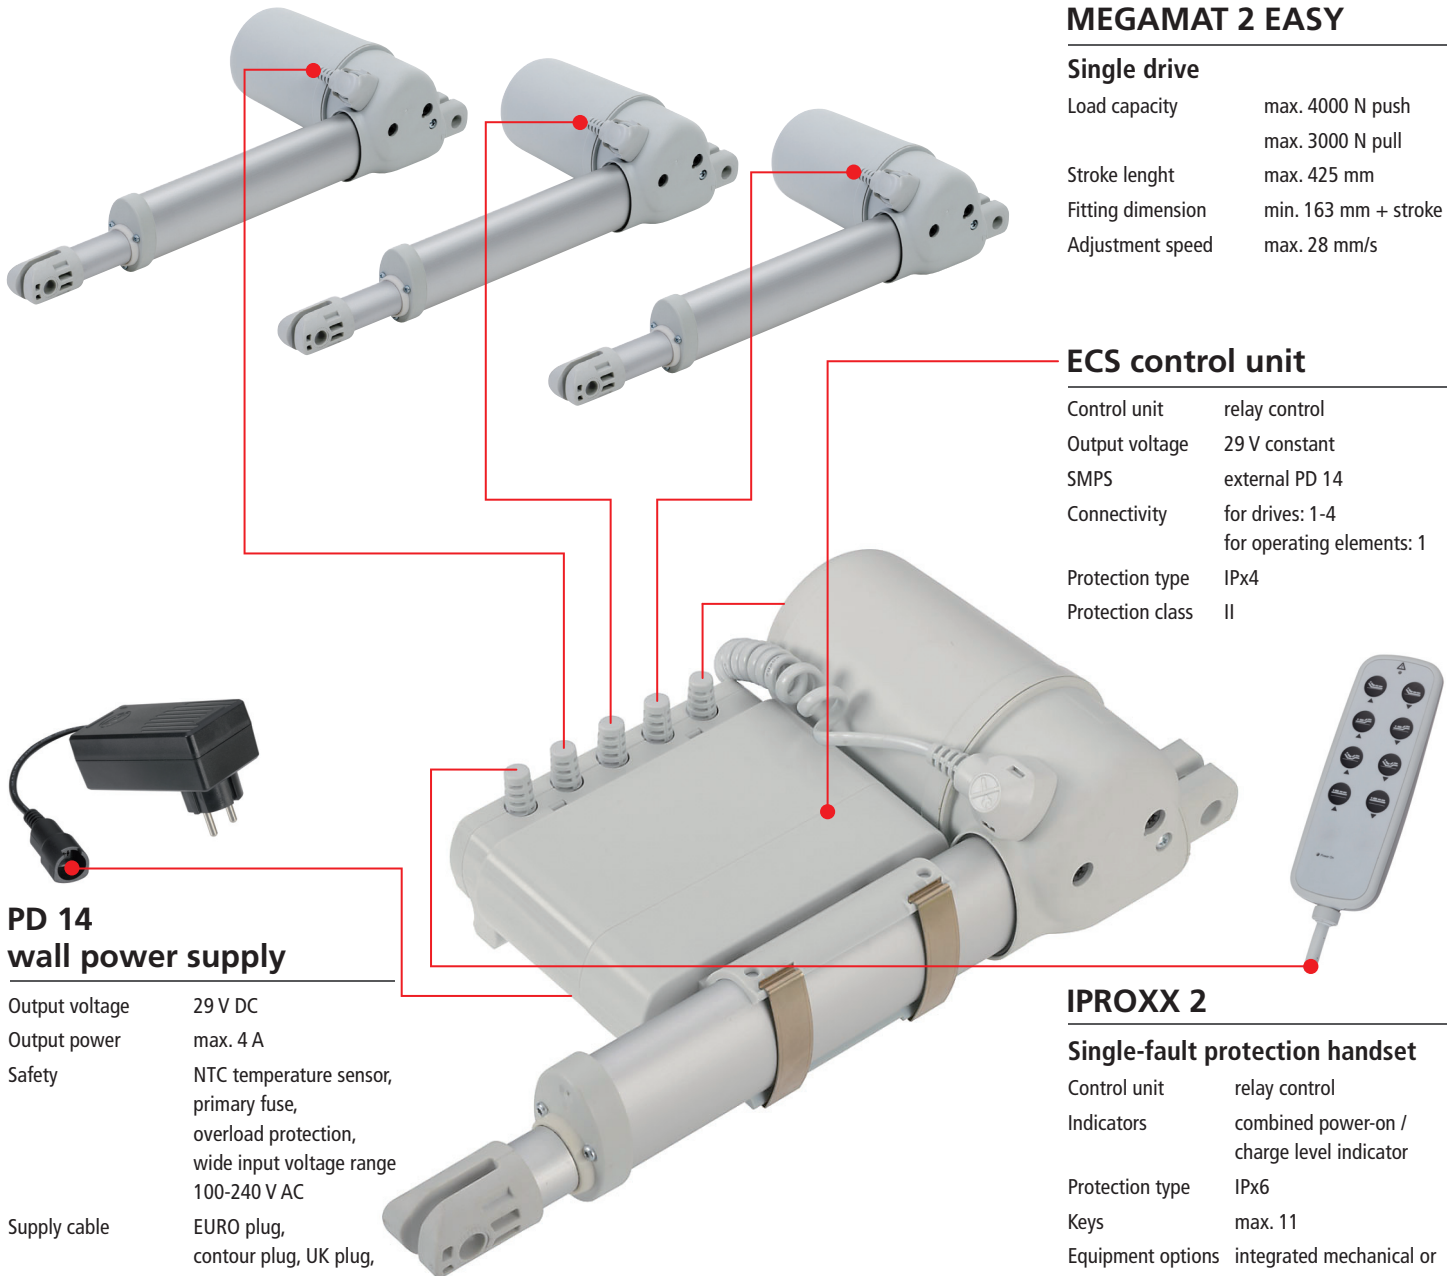

PD 14 wall power supply

Output voltage	29 V DC
Output power	max. 4 A
Safety	NTC temperature sensor, primary fuse, overload protection, wide input voltage range 100-240 V AC
Supply cable	EURO plug, contour plug, UK plug, overcurrent switch-off, short-circuit-proof output

IPROXX 2

Single-fault protection handset

Control unit	relay control
Indicators	combined power-on / charge level indicator
Protection type	IPx6
Keys	max. 11
Equipment options	integrated mechanical or programmable multi-stage locking function, FURNIBUS interface